


- LEGEND**
1. Electronic control
 2. Control panel lock
 3. Emergency stop button
 4. Door
 5. Steam inlet
 6. Condensate outlet
 7. Main switch
 8. Main power supply
 9. Air outlet
 10. Suction
 11. -
 12. Earthing connection
 13. Lint screen cover

STEAM CONNECTION:

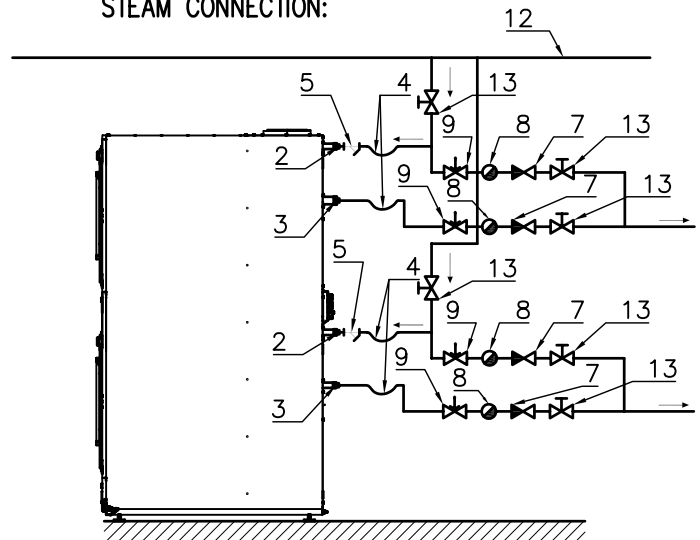

LEGEND

1. Dryer
2. Steam supply inlet (G3/4")
3. Steam outlet (G3/4")
4. Flexible hose for connecting the dryer to supply and return lines
5. Filter (G3/4") (part of delivery)
6. -
7. Check valve
8. Steam trap with built-in strainer
9. Vacuum breaker
10. Condensate return line from steam supply line
11. Steam return line
12. Steam supply line
13. Manual steam shut-off valve

MACHINE DIMENSIONS	
Width - maximum	795 mm
Depth	1240 mm
Height - maximum	2030 mm
Cylinder - diameter	2x 760 mm
- depth	2x 630 mm
- capacity	2x 285 l
Net weight	370 kg
Air outlet	~ø200 mm
Optimum air flow	650 + 650 m ³ /hod
Max. static back pressure	120 Pa
STEAM	
Heating power	
- pressure 0.3 ÷ 0.6 MPa	2x 23.5 ÷ 27.3 kW
- pressure 0.7 ÷ 1.0 MPa	2x 19.4 ÷ 22.3 kW
Steam connection	2x G3/4"
Steam pressure	0.3÷0.6 MPa / 0.7÷1.0 MPa
Condensate drain	2x G3/4"
Average steam consumption	
- pressure 0.6 MPa	2x 35.6 kg/hod
- pressure 1.0 MPa	2x 28.9 kg/hod
ELECTRICAL DATA	
Motor input	2x0.25 kW
Fun input	2x0.37 kW
Input power	1.4 kW
Voltage system	3+NPE 400 V, 50 Hz
Amps	10 A
Conductor section [mm ² Cu]	4x 1.5
Sound of pressure level	< 70 dB

EXHAUST SYSTEM:

The dryer produces hot humid air (maximum temp. 70°C) and combustible lint. To reduce a risk of fire the dryer must be exhausted to the outdoors by means of exhaust duct connected to exhaust piping.

The design of the flue system shall be such that any a condensate formed when operating the appliance from cold shall either be retained and subsequently re-evaporated or discharged.

If possible, do not install dryers and gas fired hot water heaters or the other gravity vented appliances in the same room.

Use exhaust ducts made of sheet metal or other noncombustible material.

The dryer requires an action related to air which replaced the air exhausted from the dryer. Opening(s) for air supply from outside of the building should be as close to the dryer(s) as possible.

Aerating opening(s) for the make-up air supply required per each individual dryer is 0,16m².

primus	T13/13 S	Date:	06/2006	No.	06-111-2.2
		Author:	RJ	Index/date	D/09.2008
TUMBLE DRYER					